

Mini DomiLED

With the intense colors that seem to glow with energy and its significant brightness, Mini DomiLED white LED is a highly reliable design device. Its dynamic nature makes it perfect choice for lighthing applications, office and home applications and standard industrial applications.



Features:

- > High brightness surface mount LED.
- > Based on InGaN technology.
- > 120° viewing angle.
- > Small package outline (LxWxH) of 2.0 x 1.4 x 1.3mm.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to both IR reflow soldering.
- > Environmental friendly; RoHS compliance.



Applications:

- > Automotive: interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Backlighting: button, LCD display



Optical Characteristics at Tj=25°C

| Part Ordering Number | Color | Viewing Angle° | Luminous Intensity @ IF = 20mA IV (mcd) <i>Appx. 1.1</i> | | |
|----------------------|-------|----------------|--|--------|--------|
| | | | Min. | Typ. | Max. |
| ● DNW-PJG-V2W-1 | White | 120 | 900.0 | 1400.0 | 1800.0 |
| ● DNW-PJG-V2W-FKPL | White | 120 | 900.0 | 1400.0 | 1800.0 |
| ● Not for new design | | | | | |

Electrical Characteristics at Tj=25°C

| Part Number | Vf @ If = 20 mA <i>Appx. 3.1</i> | | | Vr @ Ir = 10 µA |
|-------------|----------------------------------|----------|----------|-----------------|
| | Min. (V) | Typ. (V) | Max. (V) | Min. (V) |
| DNW-PJG | 2.8 | 3.1 | 3.6 | 5.0 |

Absolute Maximum Ratings


| | Maximum Value | Unit |
|--|---------------|------|
| DC forward current | 20 | mA |
| Peak pulse current; (tp ≤ 10µs, Duty cycle = 0.005) | 200 | mA |
| Reverse voltage <i>Appx. 6.1</i> | 5 | V |
| ESD threshold (HBM) | 2000 | V |
| LED junction temperature | 125 | °C |
| Operating temperature | -40 ... +100 | °C |
| Storage temperature | -40 ... +100 | °C |
| Power dissipation (at room temperature) | 85 | mW |
| Thermal resistance | | |
| - Junction / ambient, R _{th JA} | 480 | K/W |
| - Junction / solder point, R _{th JS} | 230 | K/W |
| (Mounting on FR4 PCB, pad size ≥ 16 mm ² per pad) | | |

Characteristics

| | Symbol | Part Number | Value | Unit |
|--|------------|-------------|---------|-----------|
| Temperature coefficient of V_F (typ) $I_F = 20\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$ | TC_V | DNW-PJG | -4.3 | mV / K |
| Temperature coefficient of I_V (typ) $I_F = 20\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$ | TC_{I_V} | DNW-PJG | -0.2 | % / K |
| Temperature coefficient of C_x (typ) $I_F = 20\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$ | TC_{C_x} | DNW-PJG | -0.0001 | C_x / K |
| Temperature coefficient of C_y (typ) $I_F = 20\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$ | TC_{C_y} | DNW-PJG | -0.0001 | C_y / K |

DNW, White Color Grouping *Appx. 2.1*

For this color bin selection, part number will be DNW-PJG-xxxx-1

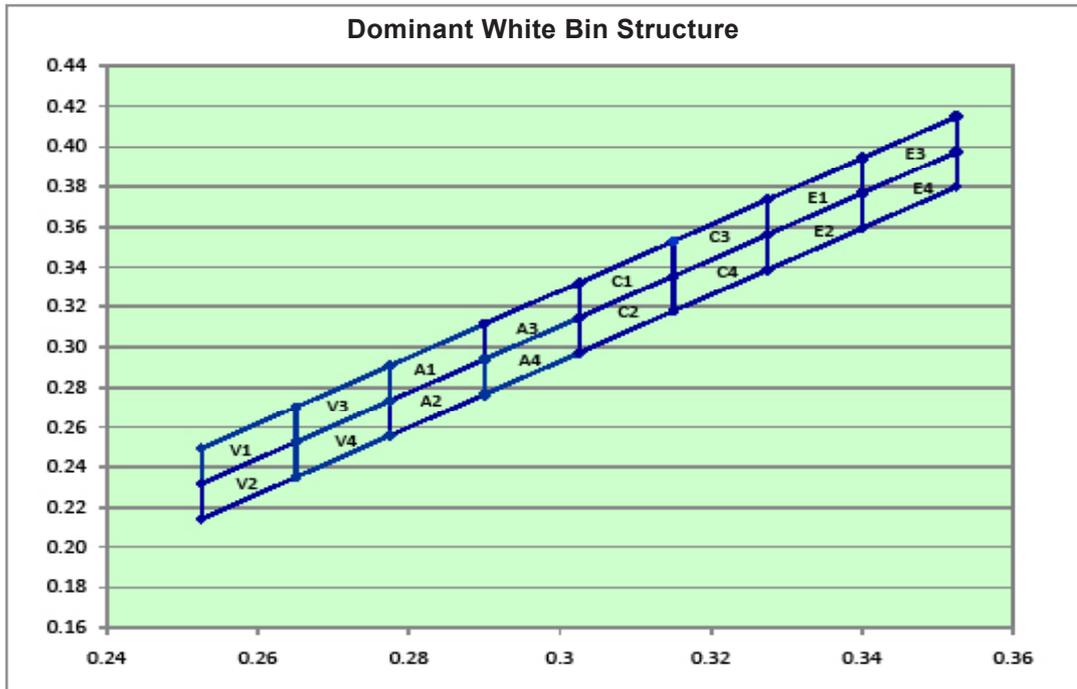

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .


| Bin | | 1 | 2 | 3 | 4 |
|-----|----|--------|--------|--------|--------|
| V1 | Cx | 0.2525 | 0.2650 | 0.2650 | 0.2525 |
| | Cy | 0.2318 | 0.2525 | 0.2700 | 0.2493 |
| V2 | Cx | 0.2525 | 0.2650 | 0.2650 | 0.2525 |
| | Cy | 0.2143 | 0.2350 | 0.2525 | 0.2318 |
| V3 | Cx | 0.2650 | 0.2775 | 0.2775 | 0.2650 |
| | Cy | 0.2525 | 0.2732 | 0.2907 | 0.2700 |
| V4 | Cx | 0.2650 | 0.2775 | 0.2775 | 0.2650 |
| | Cy | 0.2350 | 0.2557 | 0.2732 | 0.2525 |
| A1 | Cx | 0.2775 | 0.2900 | 0.2900 | 0.2775 |
| | Cy | 0.2732 | 0.2939 | 0.3114 | 0.2907 |
| A2 | Cx | 0.2775 | 0.2900 | 0.2900 | 0.2775 |
| | Cy | 0.2557 | 0.2764 | 0.2939 | 0.2732 |
| A3 | Cx | 0.2900 | 0.3025 | 0.3025 | 0.2900 |
| | Cy | 0.2939 | 0.3146 | 0.3321 | 0.3114 |
| A4 | Cx | 0.2900 | 0.3025 | 0.3025 | 0.2900 |
| | Cy | 0.2764 | 0.2971 | 0.3146 | 0.2939 |
| C1 | Cx | 0.3025 | 0.3150 | 0.3150 | 0.3025 |
| | Cy | 0.3146 | 0.3354 | 0.3529 | 0.3321 |
| C2 | Cx | 0.3025 | 0.3150 | 0.3150 | 0.3025 |
| | Cy | 0.2971 | 0.3179 | 0.3354 | 0.3146 |
| C3 | Cx | 0.3150 | 0.3275 | 0.3275 | 0.3150 |
| | Cy | 0.3354 | 0.3561 | 0.3736 | 0.3529 |
| C4 | Cx | 0.3150 | 0.3275 | 0.3275 | 0.3150 |
| | Cy | 0.3179 | 0.3386 | 0.3561 | 0.3354 |

| Bin | | 1 | 2 | 3 | 4 |
|------------|----|----------|----------|----------|----------|
| E1 | Cx | 0.3275 | 0.3400 | 0.3400 | 0.3275 |
| | Cy | 0.3561 | 0.3768 | 0.3943 | 0.3736 |
| E2 | Cx | 0.3275 | 0.3400 | 0.3400 | 0.3275 |
| | Cy | 0.3386 | 0.3593 | 0.3768 | 0.3561 |
| E3 | Cx | 0.3400 | 0.3525 | 0.3525 | 0.3400 |
| | Cy | 0.3768 | 0.3975 | 0.4150 | 0.3943 |
| E4 | Cx | 0.3400 | 0.3525 | 0.3525 | 0.3400 |
| | Cy | 0.3593 | 0.3800 | 0.3975 | 0.3768 |

Dominant color coordinate is measured with an accuracy of ± 0.01 .

DNW, White Color Grouping *Appx. 2.1*

For this color bin selection, part number will be DNW-PJG-xxxx-FKPL

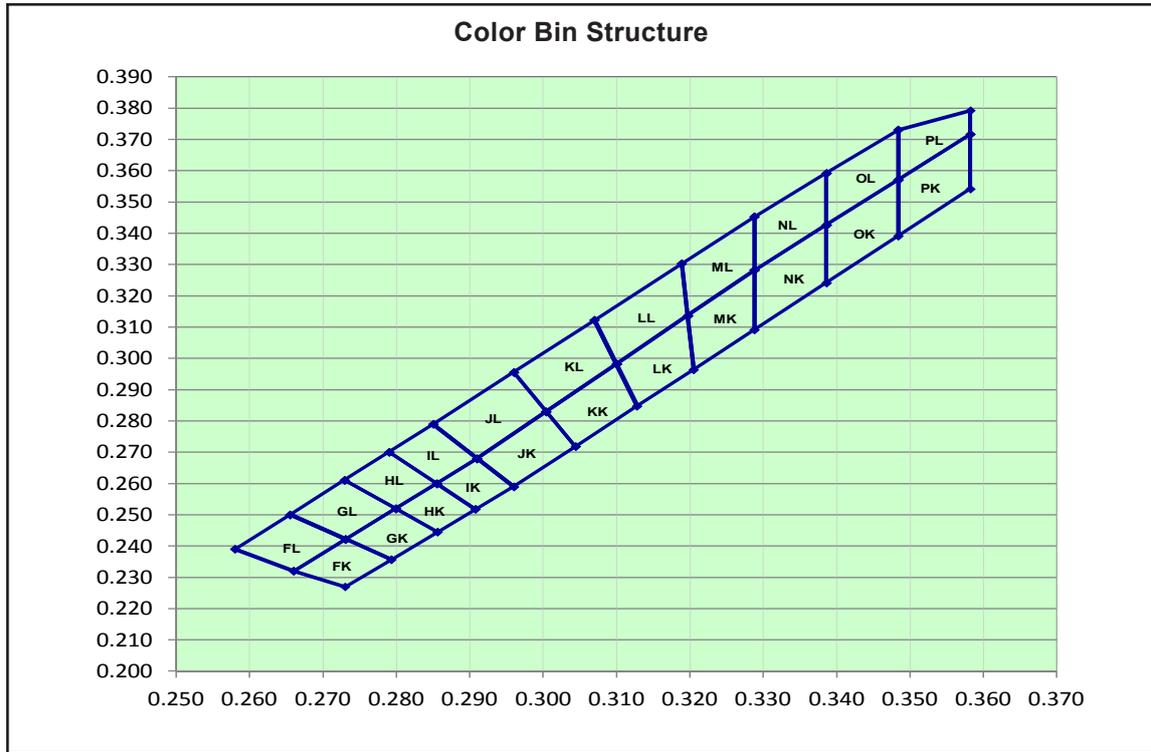

Chromaticity coordinate groups are measured with an accuracy of ± 0.01 .

| Bin | | 1 | 2 | 3 | 4 |
|-----|----|--------|--------|--------|--------|
| FK | Cx | 0.2660 | 0.2730 | 0.2793 | 0.2731 |
| | Cy | 0.2320 | 0.2270 | 0.2357 | 0.2422 |
| FL | Cx | 0.2580 | 0.2655 | 0.2731 | 0.2660 |
| | Cy | 0.2390 | 0.2500 | 0.2422 | 0.2320 |
| GK | Cx | 0.2731 | 0.2793 | 0.2856 | 0.2799 |
| | Cy | 0.2422 | 0.2357 | 0.2445 | 0.2520 |
| GL | Cx | 0.2655 | 0.2731 | 0.2799 | 0.2729 |
| | Cy | 0.2500 | 0.2422 | 0.2520 | 0.2611 |
| HK | Cx | 0.2799 | 0.2855 | 0.2908 | 0.2856 |
| | Cy | 0.2520 | 0.2600 | 0.2518 | 0.2445 |
| HL | Cx | 0.2729 | 0.2790 | 0.2855 | 0.2799 |
| | Cy | 0.2611 | 0.2701 | 0.2600 | 0.2520 |
| IK | Cx | 0.2855 | 0.2908 | 0.2960 | 0.2910 |
| | Cy | 0.2600 | 0.2518 | 0.2590 | 0.2680 |
| IL | Cx | 0.2790 | 0.2850 | 0.2910 | 0.2855 |
| | Cy | 0.2701 | 0.2790 | 0.2680 | 0.2600 |
| JK | Cx | 0.2910 | 0.2960 | 0.3044 | 0.3004 |
| | Cy | 0.2680 | 0.2590 | 0.2718 | 0.2830 |
| JL | Cx | 0.2850 | 0.2910 | 0.3004 | 0.2960 |
| | Cy | 0.2790 | 0.2680 | 0.2830 | 0.2956 |
| KK | Cx | 0.3004 | 0.3044 | 0.3128 | 0.3100 |
| | Cy | 0.2830 | 0.2718 | 0.2848 | 0.2982 |
| KL | Cx | 0.2960 | 0.3004 | 0.3100 | 0.3070 |
| | Cy | 0.2956 | 0.2830 | 0.2982 | 0.3122 |


| Bin | | 1 | 2 | 3 | 4 |
|-----|----|--------|--------|--------|--------|
| LK | Cx | 0.3100 | 0.3128 | 0.3205 | 0.3197 |
| | Cy | 0.2982 | 0.2848 | 0.2964 | 0.3137 |
| LL | Cx | 0.3070 | 0.3100 | 0.3197 | 0.3189 |
| | Cy | 0.3122 | 0.2982 | 0.3137 | 0.3303 |
| MK | Cx | 0.3197 | 0.3205 | 0.3288 | 0.3288 |
| | Cy | 0.3137 | 0.2964 | 0.3092 | 0.3282 |
| ML | Cx | 0.3189 | 0.3197 | 0.3288 | 0.3288 |
| | Cy | 0.3303 | 0.3137 | 0.3282 | 0.3453 |
| NK | Cx | 0.3288 | 0.3288 | 0.3386 | 0.3386 |
| | Cy | 0.3282 | 0.3092 | 0.3242 | 0.3427 |
| NL | Cx | 0.3288 | 0.3288 | 0.3386 | 0.3386 |
| | Cy | 0.3453 | 0.3282 | 0.3427 | 0.3592 |
| OK | Cx | 0.3386 | 0.3386 | 0.3484 | 0.3484 |
| | Cy | 0.3427 | 0.3242 | 0.3392 | 0.3571 |
| OL | Cx | 0.3386 | 0.3386 | 0.3484 | 0.3484 |
| | Cy | 0.3592 | 0.3427 | 0.3571 | 0.3730 |
| PK | Cx | 0.3484 | 0.3484 | 0.3582 | 0.3582 |
| | Cy | 0.3571 | 0.3392 | 0.3542 | 0.3716 |
| PL | Cx | 0.3484 | 0.3484 | 0.3582 | 0.3582 |
| | Cy | 0.3730 | 0.3571 | 0.3716 | 0.3792 |

Dominant color coordinate is measured with an accuracy of ± 0.01 .


Luminous Intensity Group at Tj=25°C

| Brightness Group | Luminous Intensity ^{Appx. 1.1} IV (mcd) |
|-------------------------|---|
| V2 | 900.0 ... 1125.0 |
| W1 | 1125.0 ... 1400.0 |
| W2 | 1400.0 ... 1800.0 |


Relative Luminous Intensity Vs Forward Current

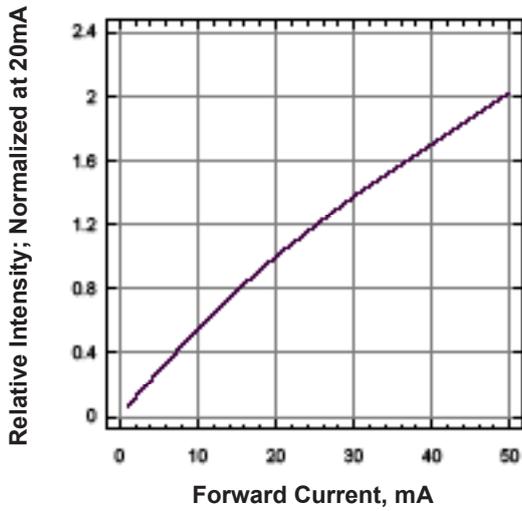


Forward Current Vs Forward Voltage

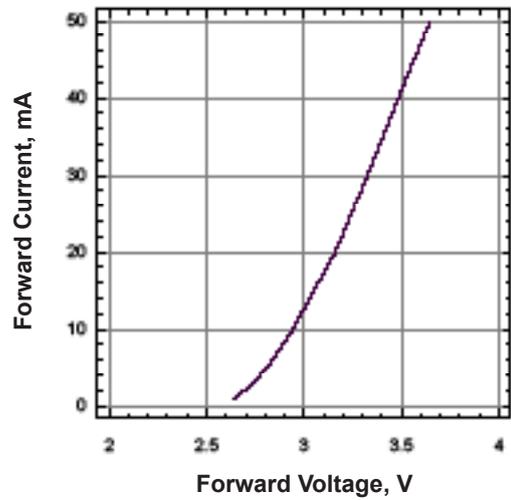


Maximum Current Vs Ambient Temperature

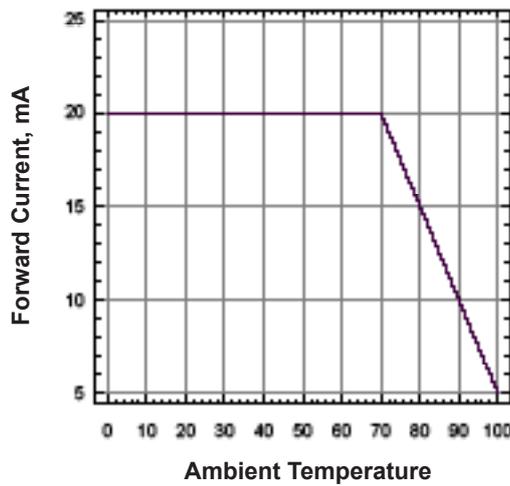


Relative Intensity Vs Wavelength

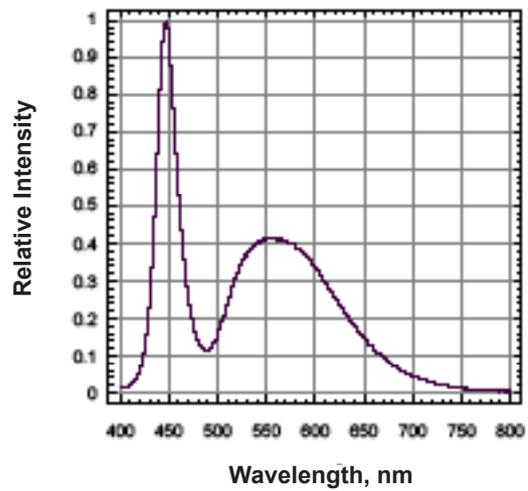


Allowable Forward Current Vs Duty Ratio
 (Ta=25 Deg C, tp≤10uS)

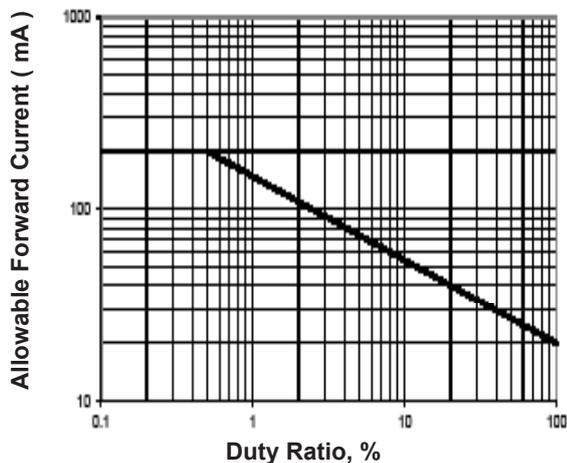


Chromaticity Coordinate Shift

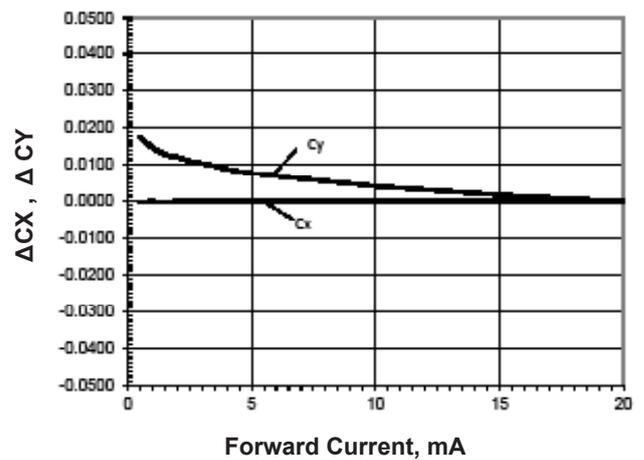

Radiation Pattern

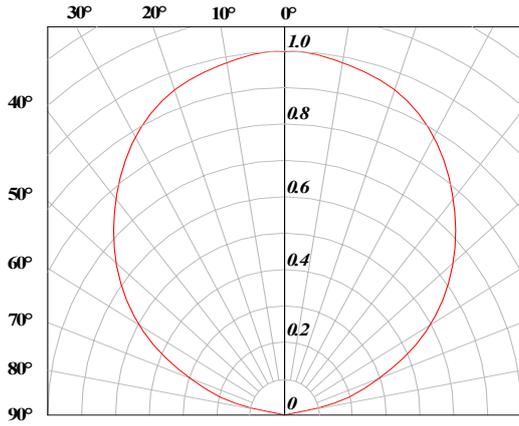


Mini DomiLED • InGaN White: DNW-PJG Package Outlines

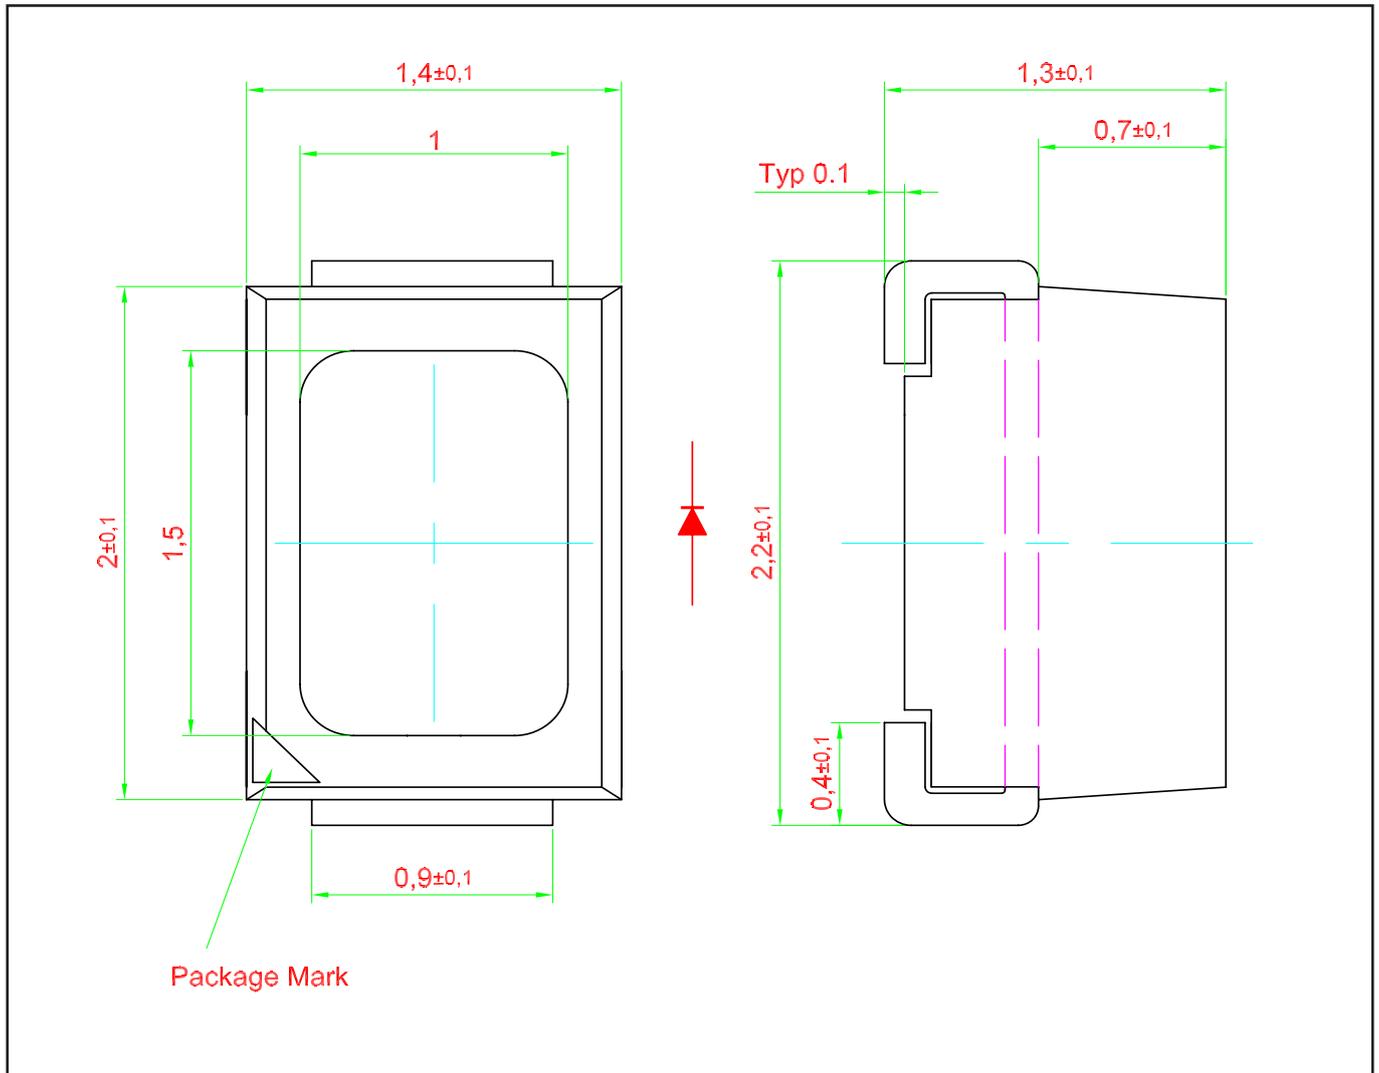


Material

| Material | |
|-----------------|---|
| Lead-frame | Cu Alloy With Ag Plating |
| Package | High Temperature Resistant Plastic, PPA |
| Encapsulant | Silicone |
| Soldering Leads | Sn-Sn Plating |

Recommended Solder Pad

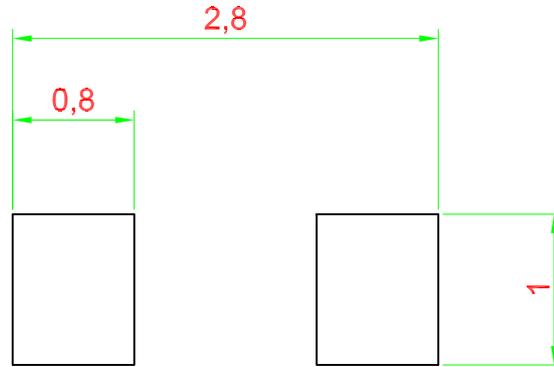

Improved Design For Better Heat Dissipation

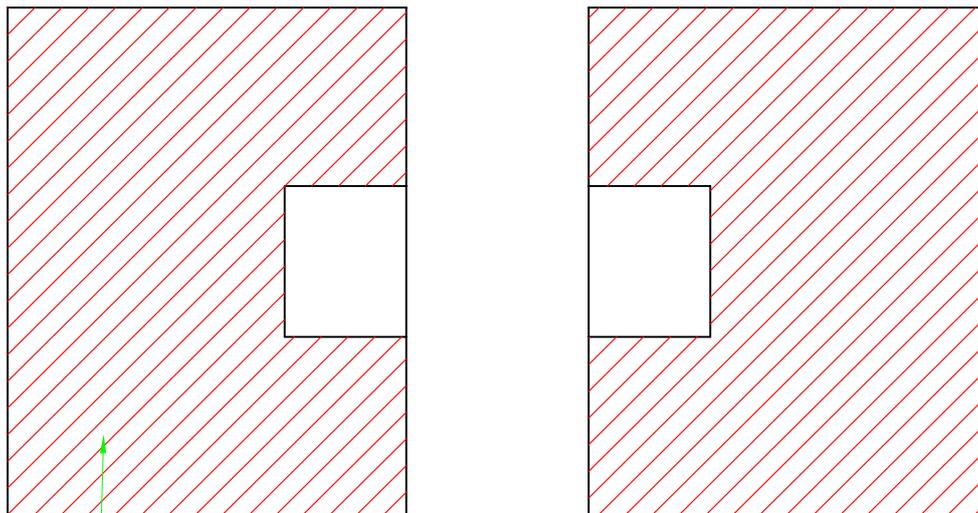


Additional Cu area for improved heat dissipation, > 16mm sq.


 Solder resist.

Taping and orientation


- Reels come in quantity of 3000 units.
- Reel diameter is 180 mm.

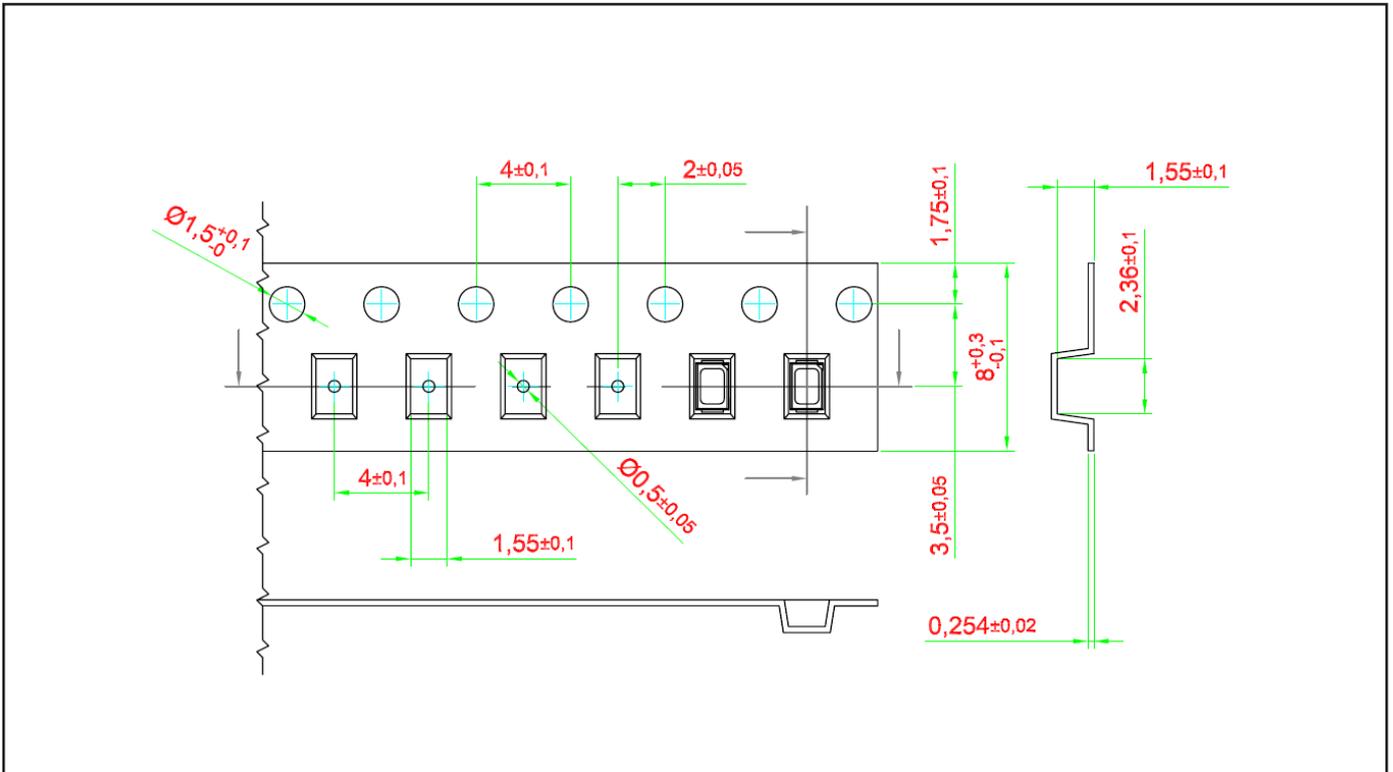


Packaging Specification

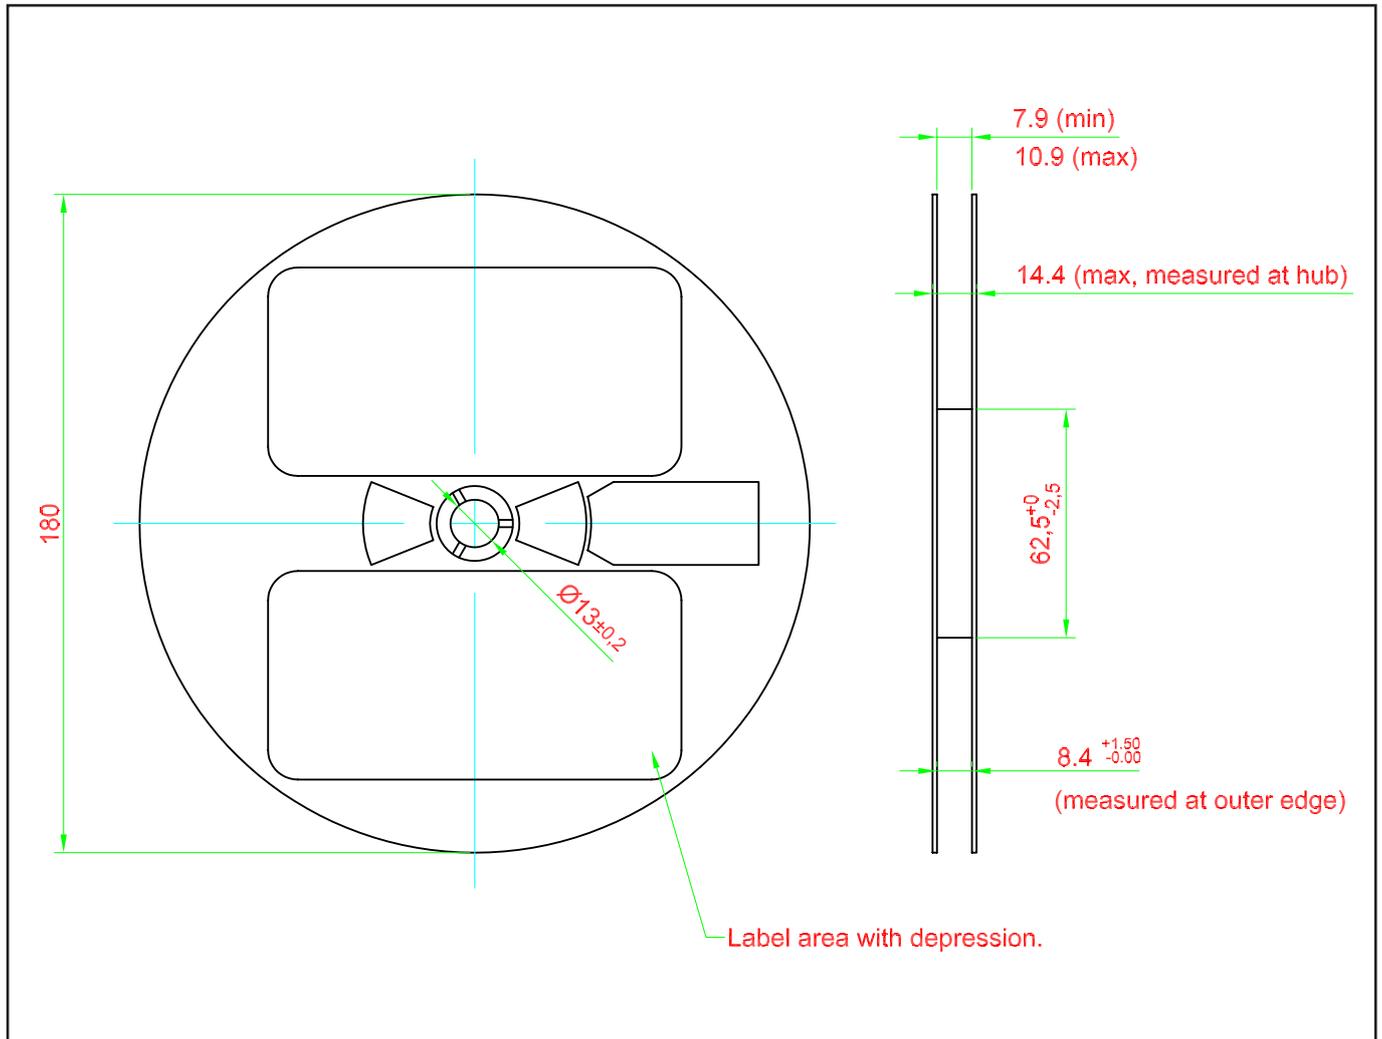


Packaging Specification

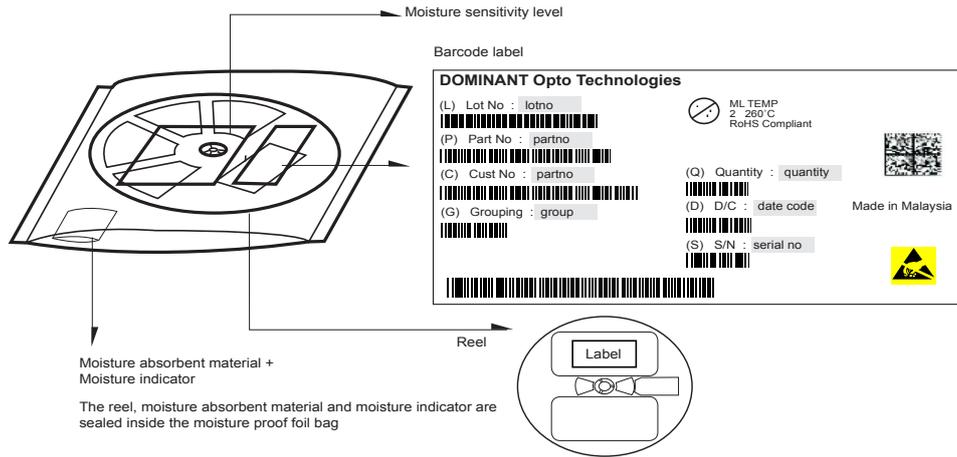

| Average 1pc Mini DomiLED | | 1 completed bag (3000pcs) |
|--------------------------|--------------|---------------------------|
| Weight (gram) | 0.007 | 200 ± 10 |

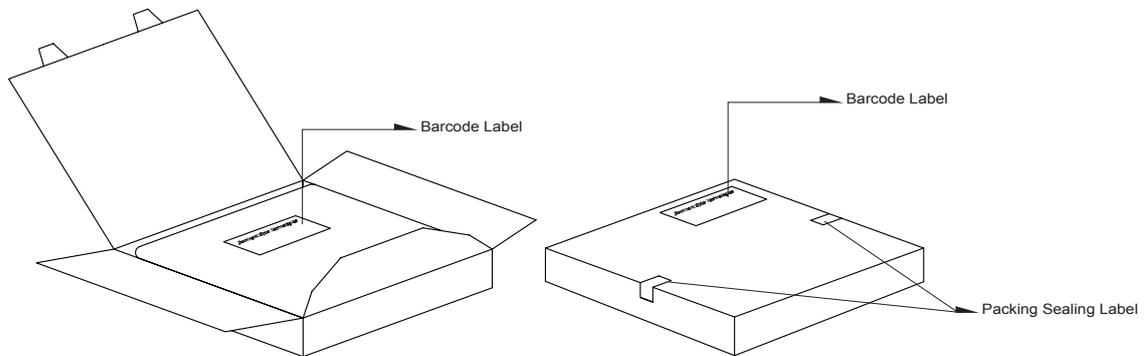


| Dimensions (mm) | |
|--------------------|-----------------------|
| Packing Box | 210 x 210 x 16 |

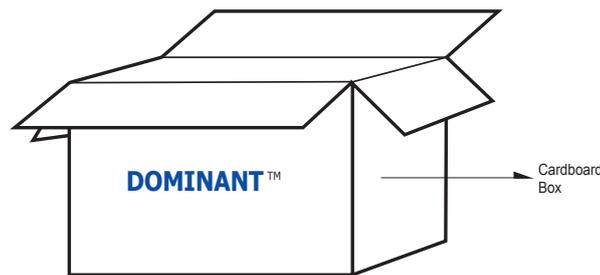

For Mini DomiLED

| Cardboard Box Size | Dimensions (mm) | Empty Box Weight (kg) | Reel / Box |
|--------------------|-----------------|-----------------------|---------------|
| Super Small | 325 x 225 x 190 | 0.38 | 9 reels MAX |
| Small | 325 x 225 x 280 | 0.54 | 15 reels MAX |
| Medium | 570 x 440 x 230 | 1.46 | 60 reels MAX |
| Large | 570 x 440 x 460 | 1.92 | 120 reels MAX |

Recommended Pb-free Soldering Profile

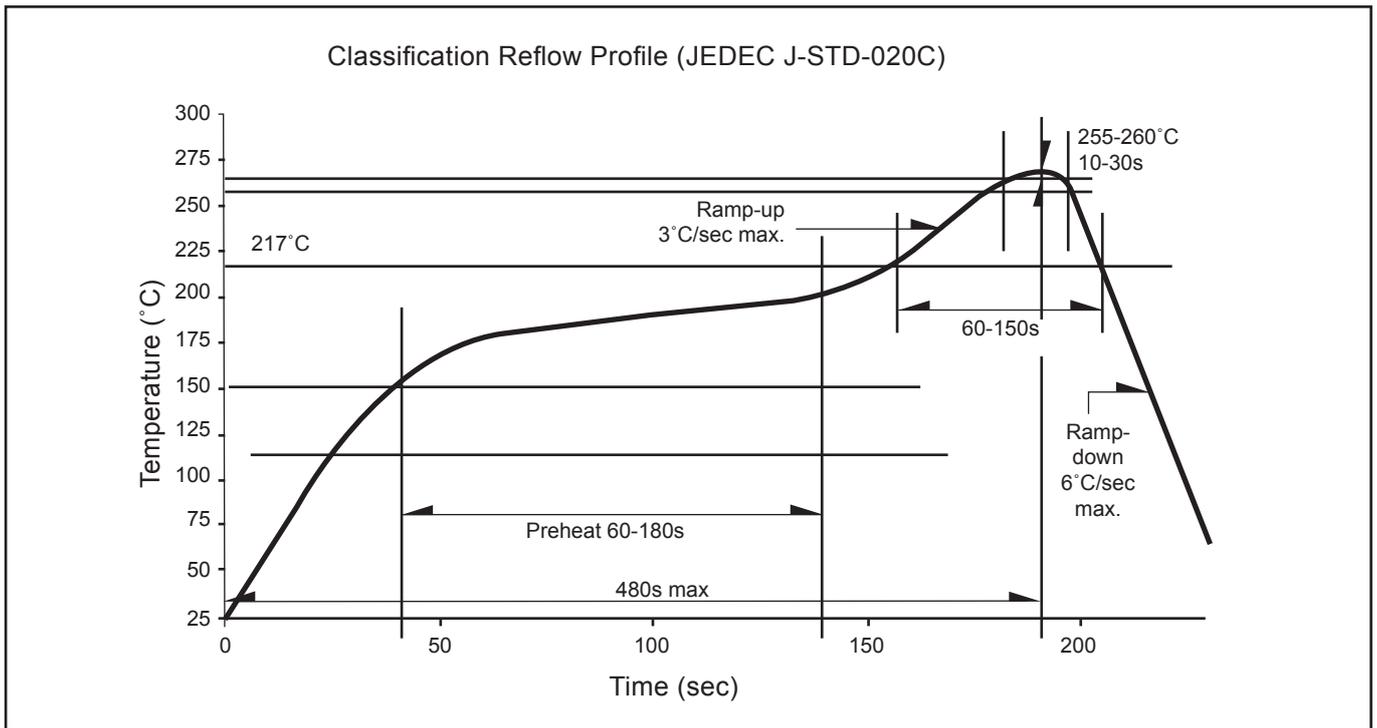

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specified in mm.

6) **Reverse Voltage:**

- 6.1 Not designed for reverse operation. Continuous reverse voltage can cause migration and LED damage.

Revision History

| Page | Subjects | Date of Modification |
|-----------|--|----------------------|
| - | Initial Release | 21 Dec 2012 |
| 4 | Update Color Bin Structure | 16 Aug 2013 |
| 3 | Add Characteristic | 05 Dec 2013 |
| 2, 4 | Add New Partno: DNW-PJG-V2W-FKPL Add Color Bin Structure | 02 Apr 2014 |
| 9 | Add graph: Allowable Forward Current Vs Duty Ratio Add graph: Chromaticity Coordinate Shift | 04 Jun 2014 |
| 2, 15, 17 | Not for New Design: DNW-PJG-V2W-1, DNW-PJG-V2W-FKPL Update Packaging Specification Add Appendix | 21 May 2018 |
| | | |
| | | |
| | | |

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, a ISO/TS 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com
