



### Primax

Synonymous with function and performance, enter the Primax, the new era of high intensity illumination in LED. With its high flux output and high luminous intensity, Primax transcends today LED lightings technology and how we perceive it. The small package outline (3.7 x 3.5 x 0.8 mm) and high intensity make it an ideal choice for backlighting, signage, exterior automotive lighting and decorative lighting.



### Features:

- > Super high brightness surface mount LED
- > 120° viewing angle.
- > Compact package outline (LxW) of 3.7 x 3.5 mm.
- > Ultra low height profile - 0.8mm.
- > Low thermal resistance.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Superior corrosion resistant

### Applications:

- > Automotive: Exterior application: eg: DRL, Back up Lamp, Position Lamp, Fog Lamp.

**Optical Characteristics at Tj=25°C**

Part Ordering Number	Color	Viewing Angle°	Luminous Flux @ 350mA (lm) <i>Appx. 1.2</i>		
			Min.	Typ.	Max.
MAW-YZHG-U3W2-VNBN	White	120	99.4	120.0	168.0


**Electrical Characteristics at Tj=25°C**

Part Number	Vf @ If = 350 mA <i>Appx. 3.1</i>		
	Min. (V)	Typ. (V)	Max. (V)
MAW-YZHG	2.9	3.2	3.6

**Absolute Maximum Ratings**

	Maximum Value	Unit
DC forward current	500	mA
Peak pulse current (tp<=10µs, Duty cycle=0.10)	750	mA
Reverse voltage	Not designed for reverse bias	V
ESD threshold (HBM)	4000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +125	°C
Storage temperature	-40 ... +125	°C
Thermal resistance		
- Real Thermal Resistance		
Junction / solder point, R <sub>th JS real</sub> (typ = 12)	15	K/W
- Electrical Thermal Resistance		
Junction / solder point, R <sub>th JS el</sub> (typ = 8) (Mounting on DOMINANT standard PCB)	10	K/W

**MAW-YZHG, White Color Grouping** *Appx. 2.1*

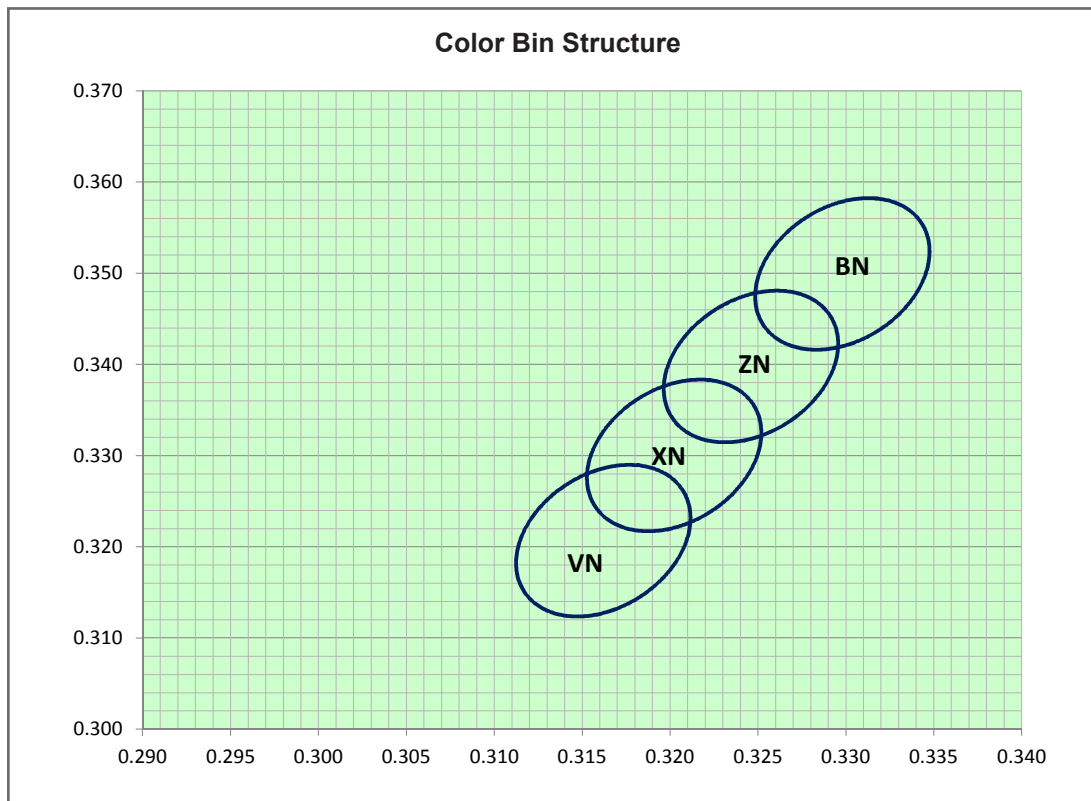

Bin	Ellipse	x	y	a	b	θ °
BN	5 Step	0.3298	0.3499	0.0085	0.0046	75.5667
ZN	5 Step	0.3246	0.3398	0.0085	0.0046	75.5667
XN	5 Step	0.3202	0.3300	0.0085	0.0046	75.5667
VN	5 Step	0.3162	0.3207	0.0085	0.0046	75.5667

InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance current pulsing should be used for dimming purposed.

**Luminous Intensity Group at Tj=25°C**

Brightness Group	Luminous Flux (lm) <i>Appx. 1.2</i>
U3	99.4 ... 113.6
V2	113.6 ... 129.2
V3	129.2 ... 147.7
W2	147.7 ... 168.0


**Vf Binning (Optional)**

Vf Bin @ 350mA	Forward Voltage (V) <i>Appx. 3.1</i>
V0	2.90 ... 3.20
V1	3.20 ... 3.50
V2	3.50 ... 3.80

Please consult sales and marketing for special part number to incorporate Vf binning.


**Relative Luminous Flux Vs Forward Current**

$\Phi_v/\Phi_v(350\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$

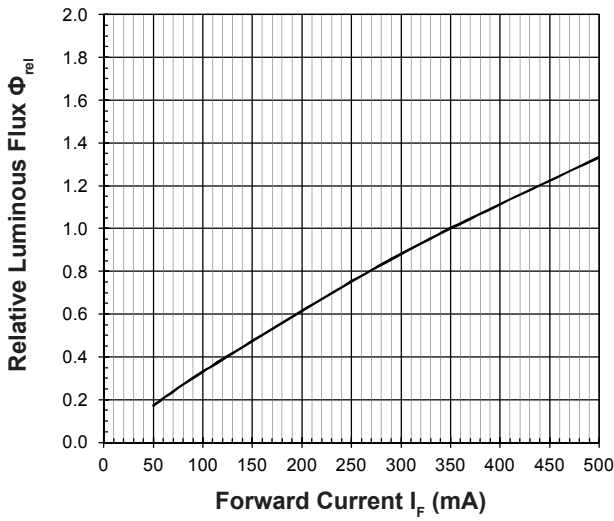


**Forward Current Vs Forward Voltage**

$I_F = f(V_F); T_j = 25^\circ\text{C}$

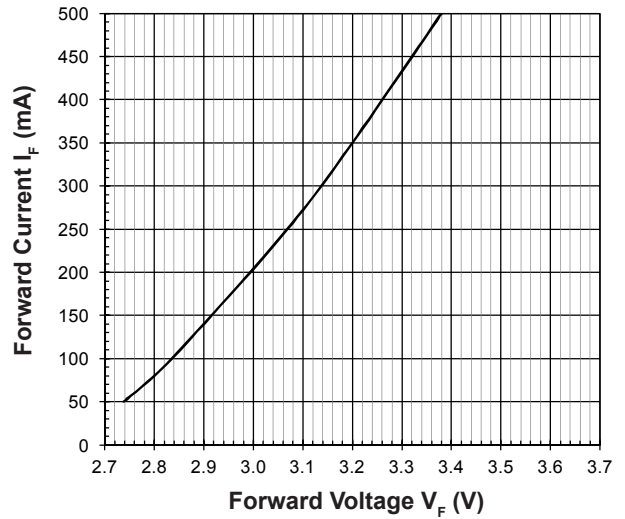


**Maximum Current Vs Temperature**

$I_F = f(T)$

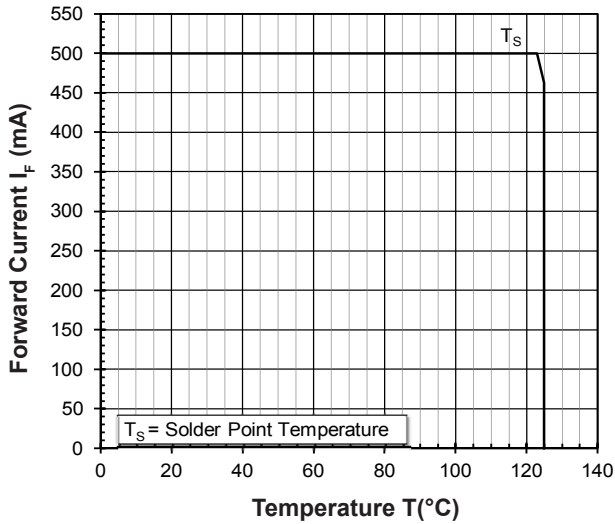


**Relative Spectral Emission**

$\Phi_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 350\text{mA}$

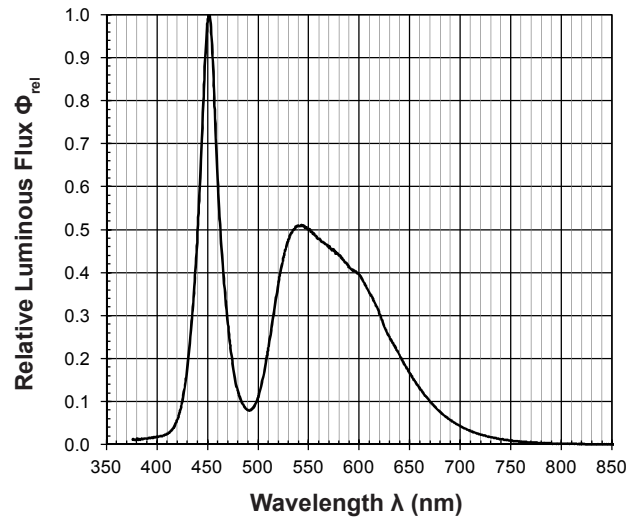


**Chromaticity Coordinate Shift Vs Forward Current**

$\Delta Cx, \Delta Cy = f(I_F); T_j = 25^\circ\text{C}$

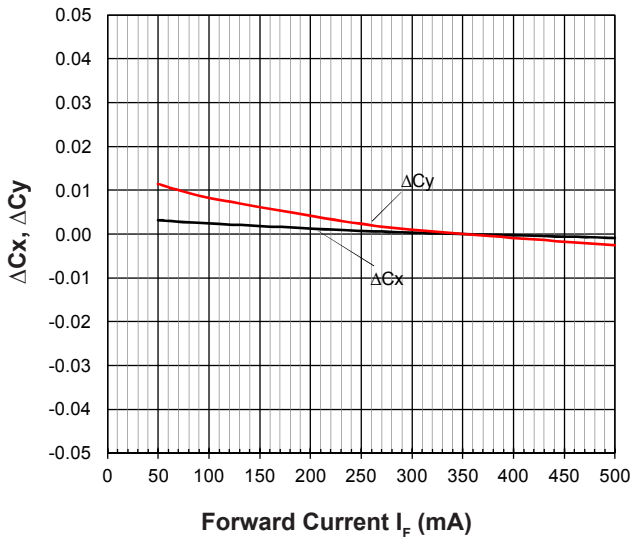


**Allowable Forward Current Vs Duty Ratio**


$(T_j = 25^\circ\text{C}; t_p \leq 10\mu\text{s})$

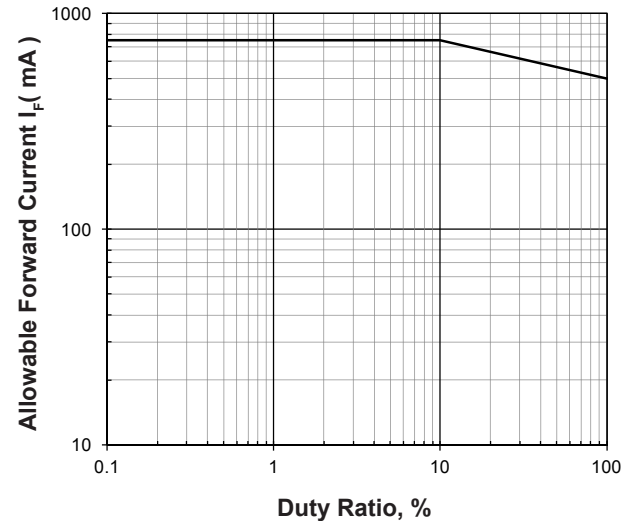

**Radiation Pattern**

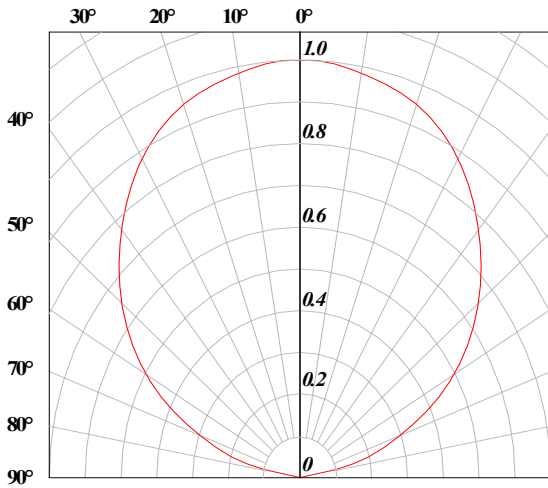


**Relative Forward Voltage Vs Junction Temperature**

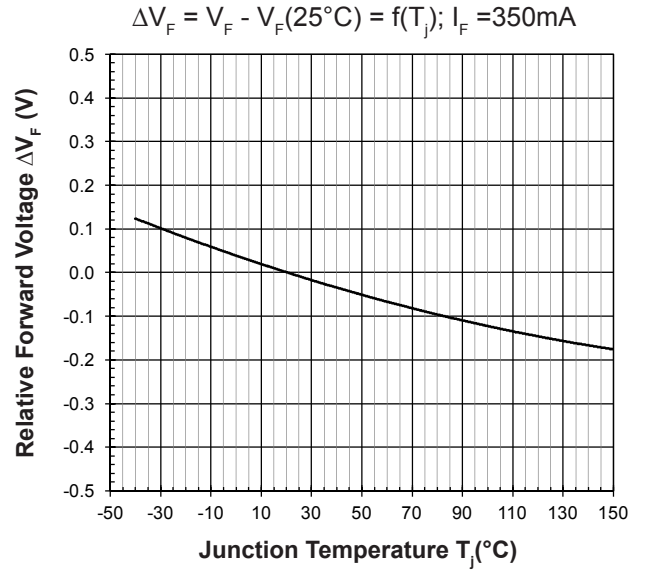


**Relative Luminous Flux Vs Junction Temperature**

$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 350\text{mA}$

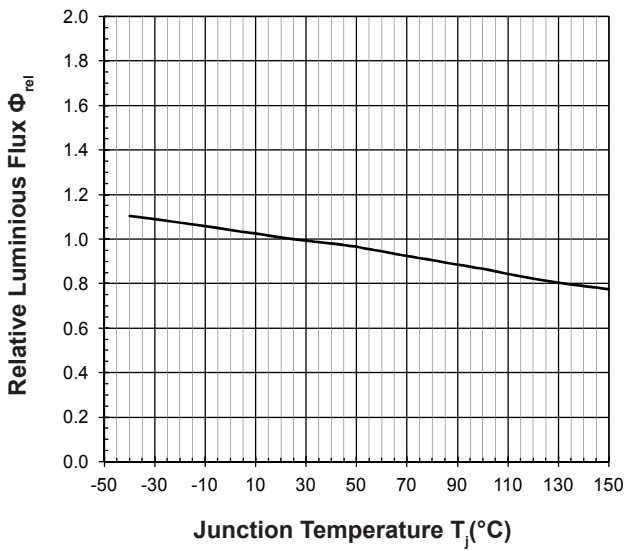


**Chromaticity Coordinate Shift Vs Junction Temperature**

$\Delta C_x, \Delta C_y = f(T_j); I_F = 350\text{mA}$

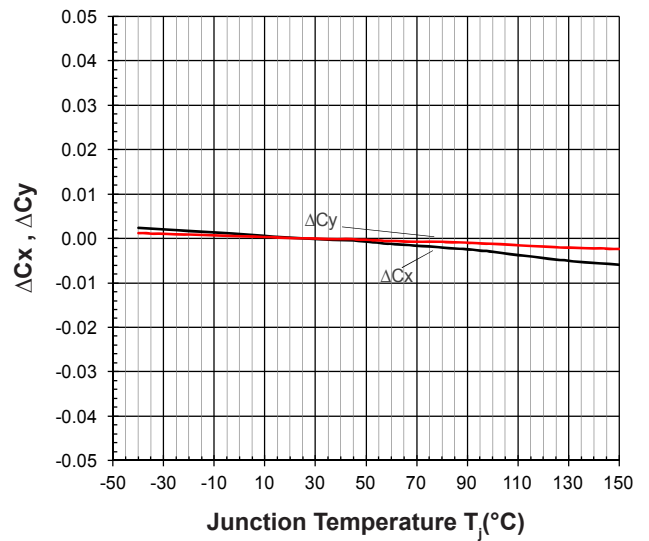

**PrimaxPlus • 350 InGaN White: MAW-YZHG-VNBN Package Outlines**

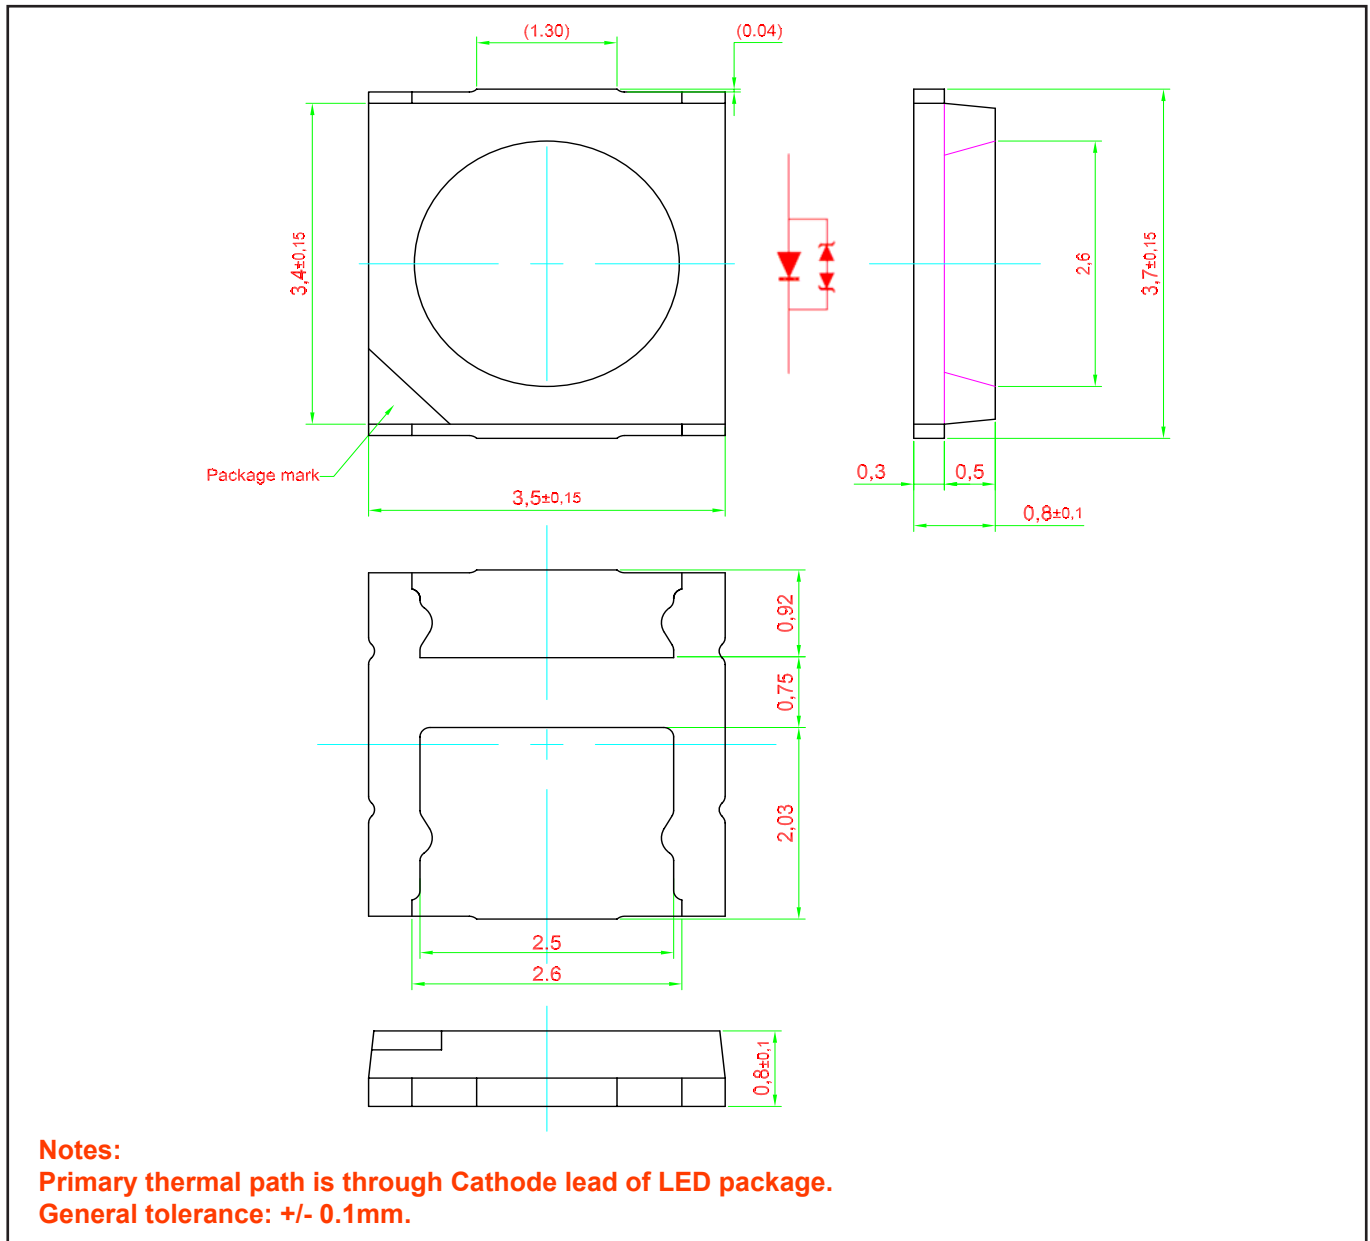


**Material**

	Material
Lead-frame	Cu Alloy With Au Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone
Soldering Leads	Au Plating

Note: This product is Pb free


**Recommended Solder Pad**

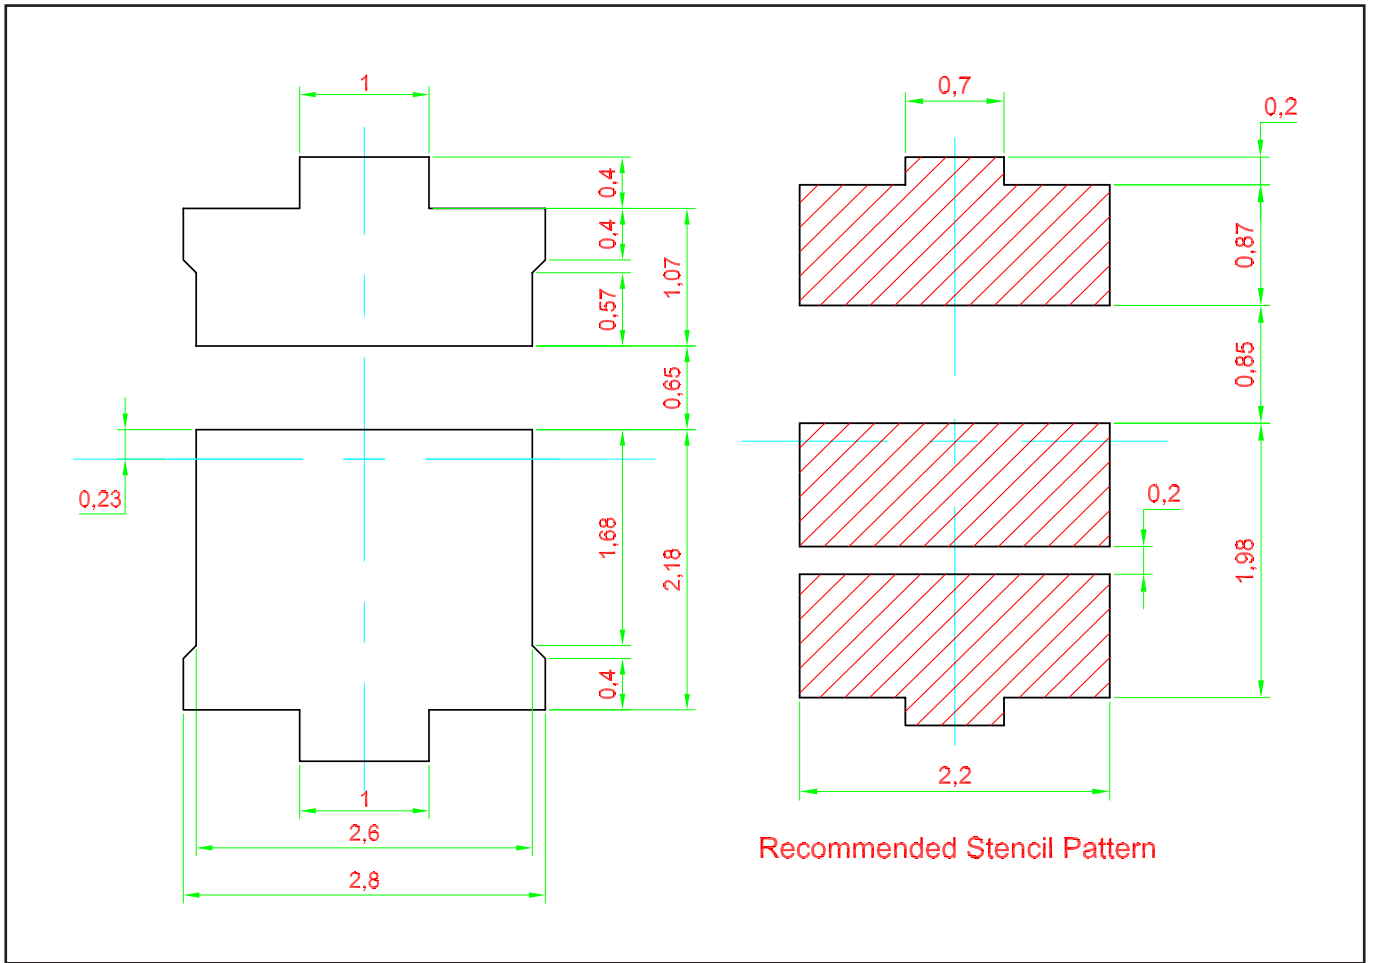




## Taping and orientation


- Reels come in quantity of 1000 units.
- Reel diameter is 180 mm.

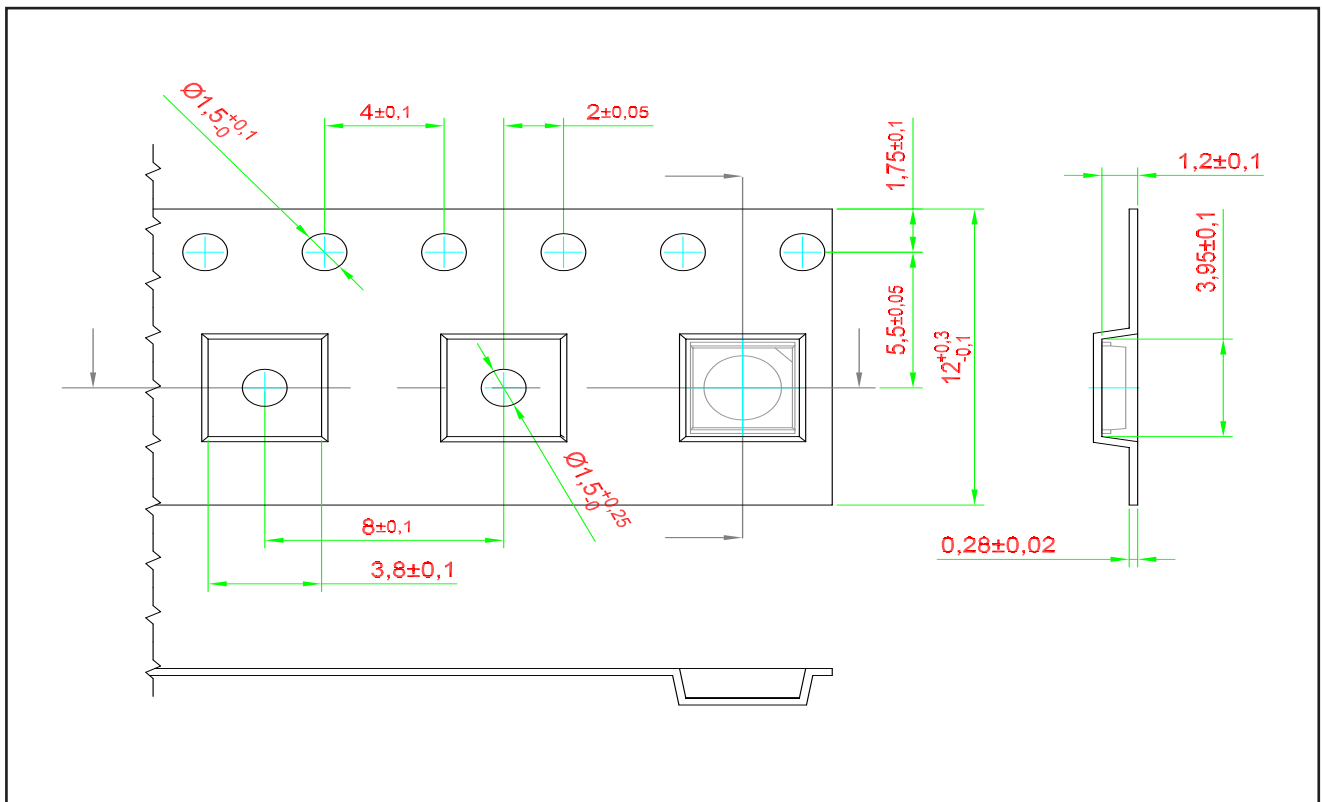


**Packaging Specification**

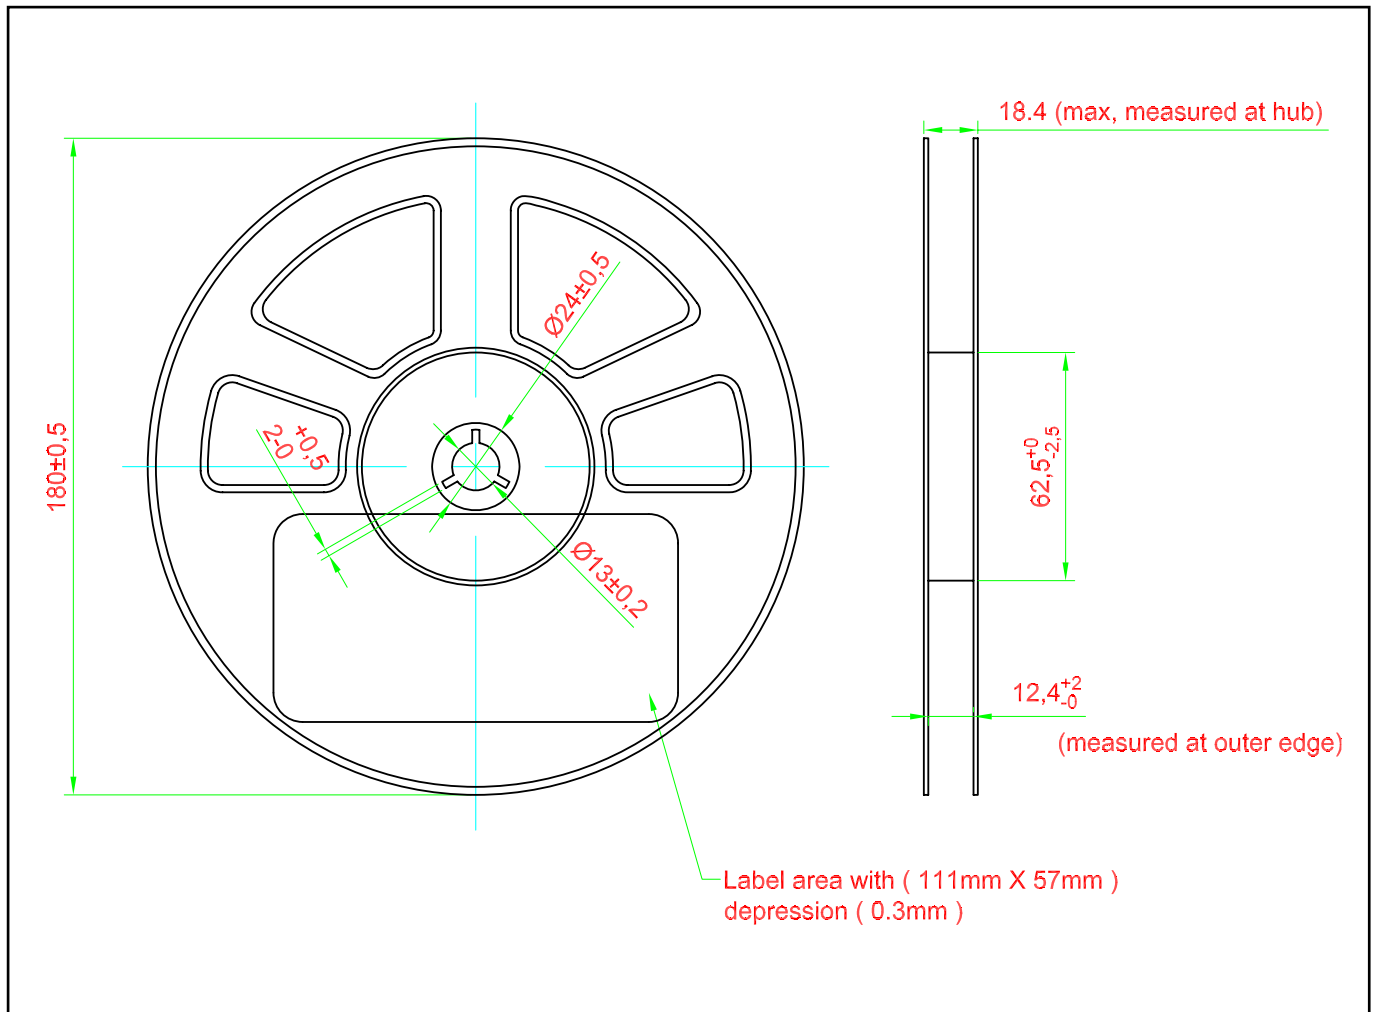

**Packaging Specification**

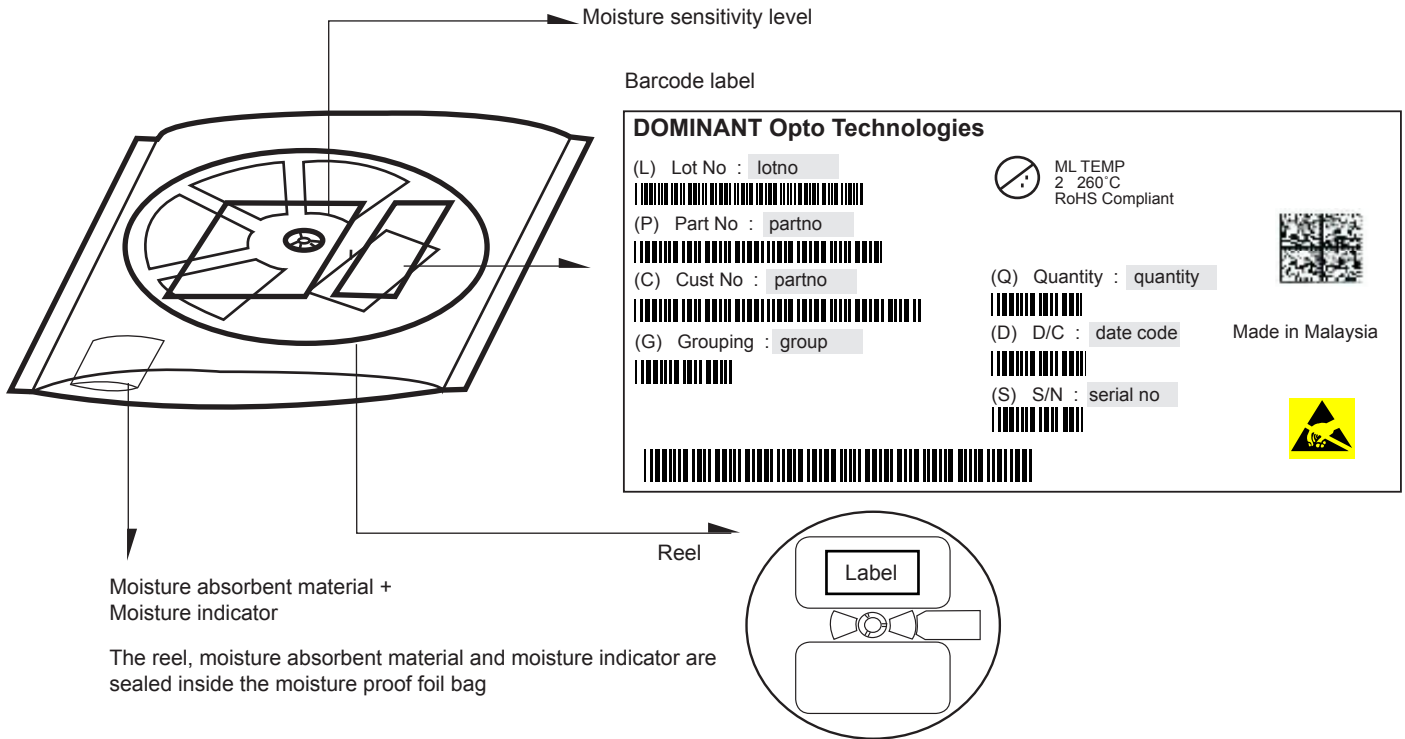


	Average 1pc PrimaxPlus	1 completed bag (1000pcs)
<b>Weight (gram)</b>	<b>0.034</b>	<b>230 ± 10</b>

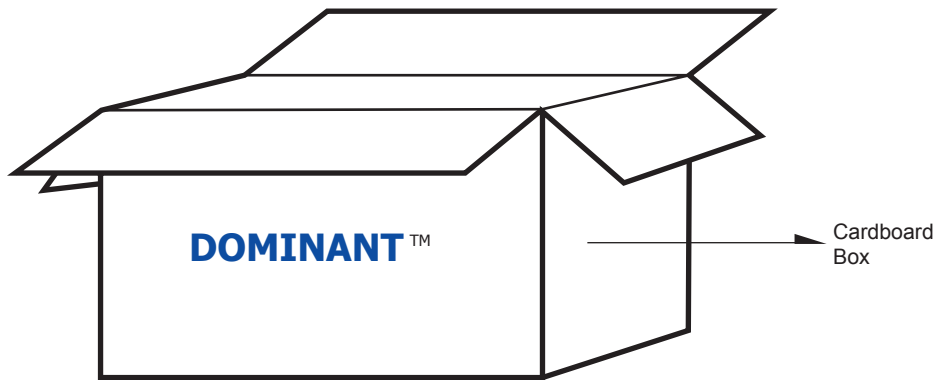

**For PrimaxPlus**

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box
Super Small	325 x 225 x 190	0.38	7 reels MAX
Small	325 x 225 x 280	0.54	11 reels MAX
Medium	570 x 440 x 230	1.46	48 reels MAX
Large	570 x 440 x 460	1.92	96 reels MAX

**Recommended Pb-free Soldering Profile**

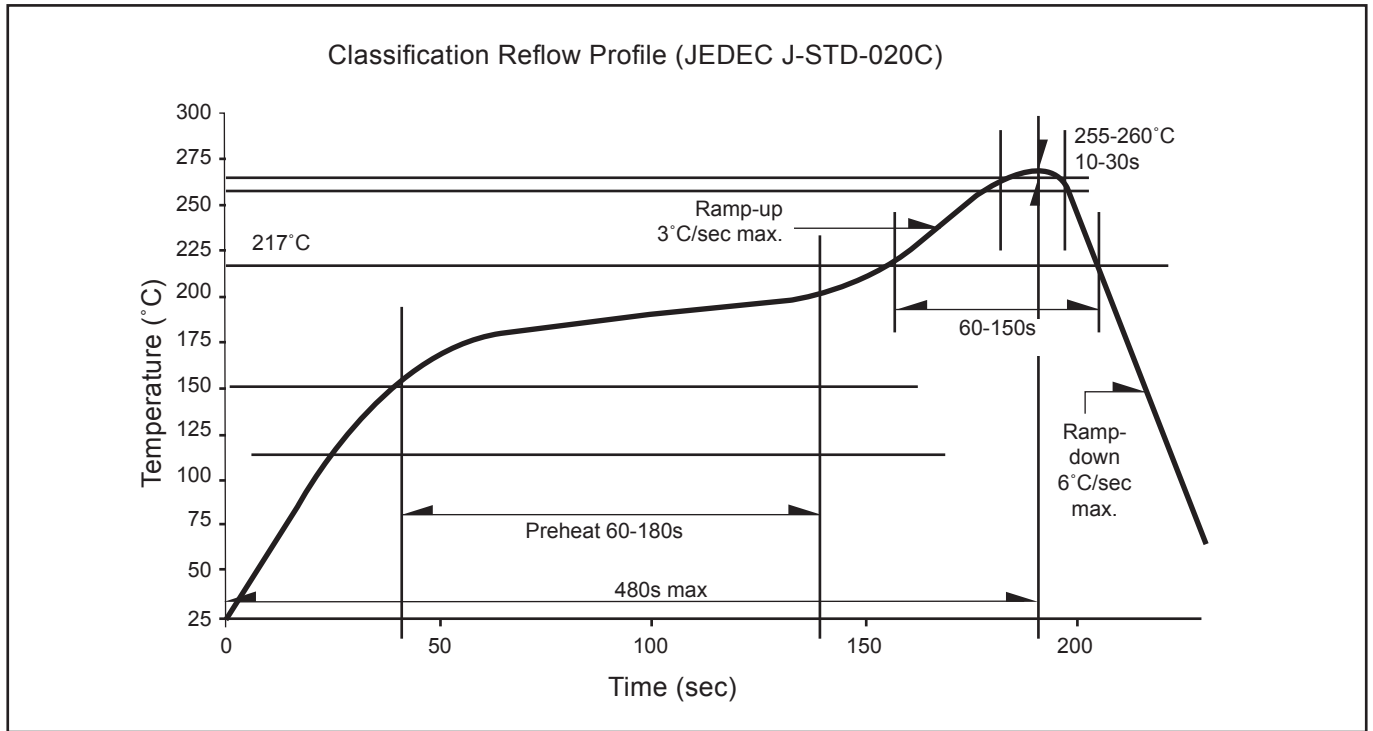

## Appendix

### 1) **Brightness:**

- 1.1 Luminous intensity is measured with an internal reproducibility of  $\pm 8 \%$  and an expanded uncertainty of  $\pm 11 \%$  (according to GUM with a coverage factor of  $k=3$ ).
- 1.2 Luminous flux is measured with an internal reproducibility of  $\pm 8 \%$  and an expanded uncertainty of  $\pm 11 \%$  (according to GUM with a coverage factor of  $k=3$ ).

### 2) **Color:**

- 2.1 Chromaticity coordinate groups are measured with an internal reproducibility of  $\pm 0.005$  and an expanded uncertainty of  $\pm 0.01$  (accordingly to GUM with a coverage factor of  $k=3$ ).
- 2.2 DOMINANT wavelength is measured with an internal reproducibility of  $\pm 0.5\text{nm}$  and an expanded uncertainty of  $\pm 1\text{nm}$  (accordingly to GUM with a coverage factor of  $k=3$ ).

### 3) **Voltage:**

- 3.1 Forward Voltage,  $V_f$  is measured with an internal reproducibility of  $\pm 0.05\text{V}$  and an expanded uncertainty of  $\pm 0.1\text{V}$  (accordingly to GUM with a coverage factor of  $k=3$ ).



## About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, a ISO/TS 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

### **Please contact us for more information:**

DOMINANT Opto Technologies Sdn. Bhd  
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.  
Tel: +606 283 3566 Fax: +606 283 0566  
E-mail: [sales@dominant-semi.com](mailto:sales@dominant-semi.com)

---